




VARDaflex Eco AC 3000K 5M-Rolle Flex.LED-Strip, 200-240V 50/60Hz IP65

Article nr.: B74905-V2

for outdoor use, IP65 · UV-resistant · can be separated every 500 mm or 27 LEDs · number of LEDs: 270 · LED pitch: 18.51 mm · beam angle: 120° · CRI: >90 · lumen per meter: 557 lm · voltage: 230V AC · power per meter: 8 W · lifetime L70B50: >= 30.000 h · energy efficiency class: G · LxWxH in mm: 5.000 x 15.5 x 6.5 · Easy installation with solderless connector. · Maximum length per connection: 50 meter. New connectors for greater length. · Delivery contents: 5 meter roll, in-feeder connector and an end cap as provided · not dimmable

TECHNICAL DATA

Unit Code	pcs
BAR code	4012094229058
Housing colour	Weiss
Length	5000.00 mm
Width	15.50 mm
Height	6.50 mm
LED colour	ca. 3000K warmweiß
Lightoutput per fixture	2785.00 lm
Lightoutput per LED	10.31 lm
Lamp	including LED

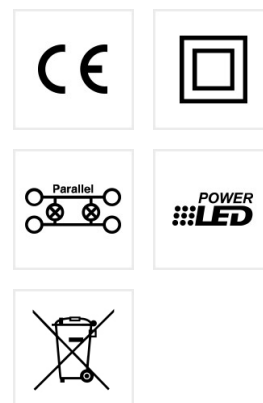



**VARDAflex Eco AC 3000K 5M-Rolle
Flex.LED-Strip, 200-240V 50/60Hz IP65**
Article nr.: B74905-V2

TECHNICAL DATA

IP rating	65
Power	40 W
Voltage	220-240 V
Amount of LED	270
Temperature range	-20 - 40
LED per meter	54
Dimension of segments	500.00 mm
Energy efficiency class	EEK-Label_G
CRI	≥ 90
Lifetime L70B50	30.000 h
Suitable light source	

