



VARDAflex Sauna TVQ - 2700K S?-??


**Flex. LED-Strip, 24V, 6W/m, IP68,
2700K TVQ**

Article nr.: S76093-V2

Flexible LED Stripe sealed in UV-, chlorine-, salt water-, solvent- and heat-resistant special silicone · for indoor- and outdoor use, IP68 · specially for the sauna area · cuttable every 55.56 mm / 6 LEDs · amount of LEDs per meter: 108 · LED pitch: 9.26 mm · beam angle: 120° · CRI: >80 · luminous flux per meter: 454 lm · voltage: 24V DC · power per meter: 6 W · lifespan L70B50: >= 36.000 h · WxH in mm: 16 x 17 · Temperature range: -45 to +90°C · Processing temperature: +10 to +90°C · maximum operating length with connection on one and both sides: 10 meters · min. bending diameter vertical: 300 mm · anti-wicking ferrule diameter = 15 mm: the anti-wicking ferrule is located at · 115 mm from the connector on the cable. · the anti-wicking ferrule is not included in the rutech Lightdesign version. · Attention. This item can only be ordered with injection moulded feeder/end cap.

TECHNICAL DATA

Unit Code	metre
BAR code	4012094230931
Housing colour	Weiss
Width	16.00 mm
Height	17.00 mm
LED colour	ca. 2700K ultra warmweiß
Lightoutput per LED	4.20 lm
Lamp	including LED
IP rating	68
Psb	0,00 W






VARDAflex Sauna TVQ - 2700K S?-??

**Flex. LED-Strip, 24V, 6W/m, IP68,
2700K TVQ**

Article nr.: S76093-V2

TECHNICAL DATA

Voltage	24 V
Material	Kunststoff
Temperature range	-45 - 90
LED per meter	108
Dimension of segments	55.56 mm
CRI	≥ 80
Lifetime L70B50	36.000 h
Suitable light source	






VARDAflex Sauna TVQ - 2700K S?-??

Flex. LED-Strip, 24V, 6W/m, IP68,
2700K TVQ

Article nr.: S76093-V2

TECHNICAL DRAWING

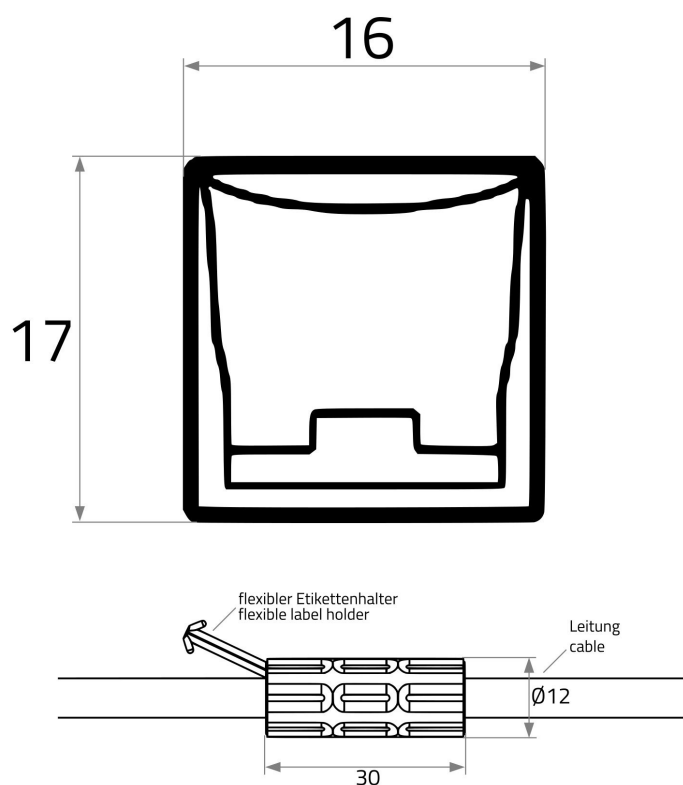

Wasserstop

Der Wasserstop befindet sich ca. 115 mm entfernt von der Einspeisung des LED Strips auf der Zuleitung.

Anti-wicking ferrule

The anti-wicking ferrule is located at 115 mm from the connector on the cable.